



FEATURES

- Single stage, direct-driven
- Air-cooled, no water required
- Simple installation
- Low noise levels
- Compact design
- Integral exhaust filter, oil free discharge air
- Includes pressure gauge and gas ballast


APPLICATIONS

- Meat packaging
- Food processing
- Thermoforming
- Composites
- Medical
- Laboratory
- Vacuum cooling
- Robotics
- Degassing
- Autoclaves

OPTIONAL ACCESSORIES

- Pre-Assembled Vacuum Kit Available (KVRXA-165 & KVRXA-202): Includes all plumbing, filtration, check-valves, regulating valves, and gauges required for quick installation and easy maintenance.



PERFORMANCE (60HZ)

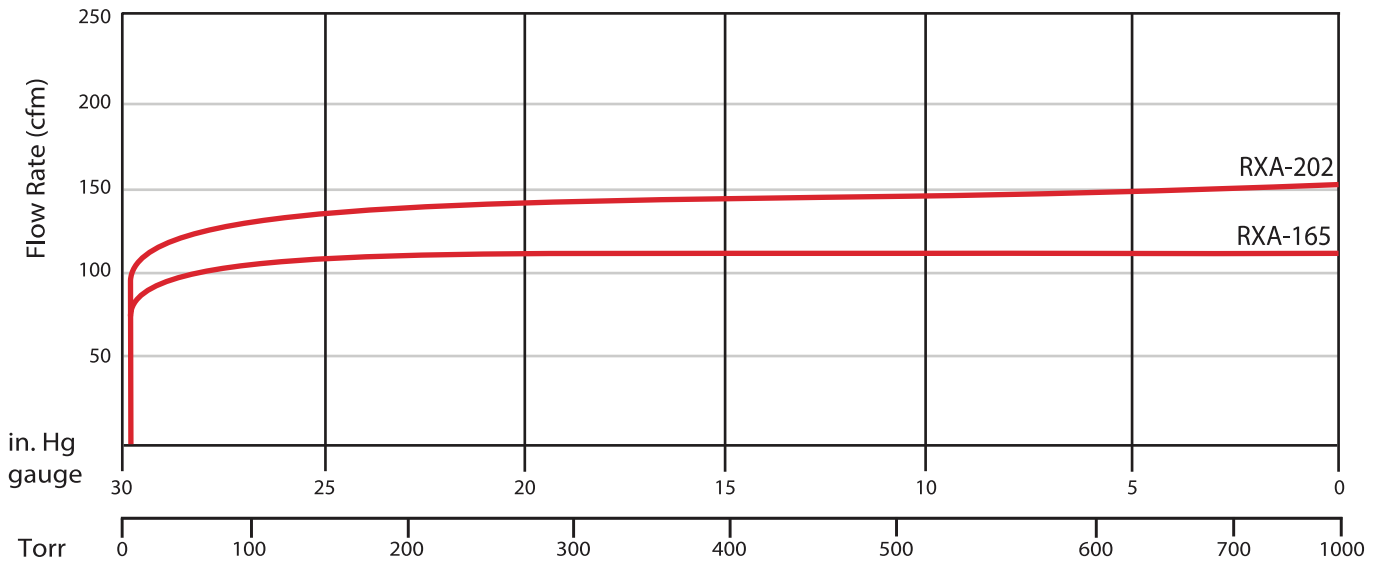

Model	Phase	Displacement (cfm)	Ultimate Continuous Vacuum (inHg/Torr)	Motor Output	Motor Speed (RPM)	Voltage (V)	FLA	Noise Level (dBA)	Approx. Weight (lb)	Oil Capacity (L)
RXA-165	3	113	29.91/0.075	5.0	1800	230/460	12.4/6.2	75	273	8
RXA-202	3	152	29.91/0.075	7.5	1800	230/460	18.8/9.4	77	320	8

All measurements are ±10%. Standard motor is Class 1 Div 2.

APPROXIMATE DIMENSIONS

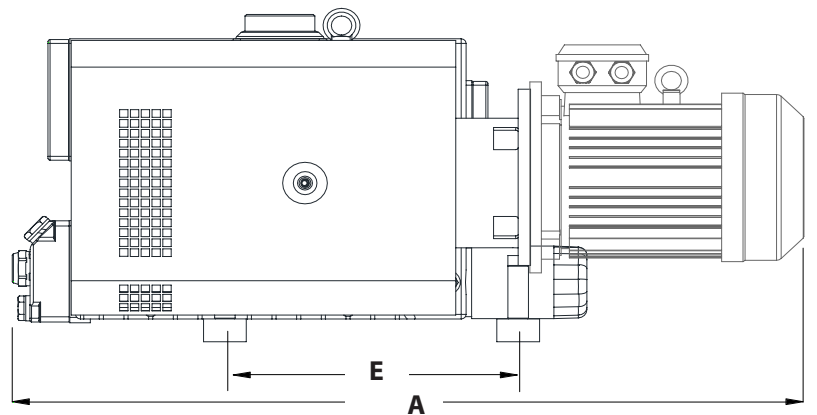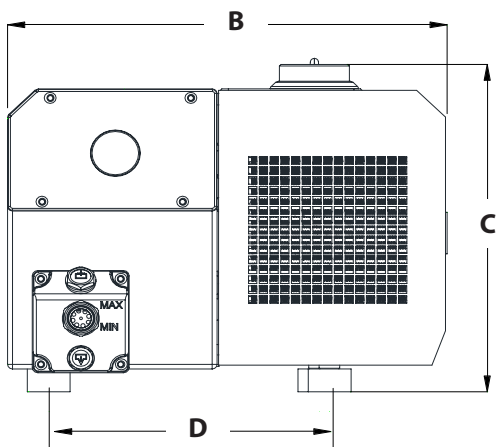

Model	A	B	C	D	E	Inlet/Outlet
RXA-165	35.6"	21.1"	16.9"	11.1"	11.7"	2.00" NPT
RXA-202	37.9"	21.1"	16.9"	11.1"	14.1"	2.00" NPT

Please contact the factory for precise dimensions.

