

FEATURES

- Single stage, direct-driven
- Air-cooled, no water required
- Simple installation
- Low noise levels
- Compact design
- Integral exhaust filter, oil free discharge air
- Includes pressure gauge

APPLICATIONS


- Meat packaging
- Food processing
- Thermoforming
- Composites
- Medical
- Laboratory
- Vacuum cooling
- Robotics
- Degassing
- Autoclaves

OPTIONAL ACCESSORIES

- Oil level sight glass
- Exhaust pressure gauge
- Exhaust cover (threaded)
- **Pre-Assembled Vacuum Kit Available (KVRXA-21):** Includes all plumbing, filtration, check-valves, regulating valves, and gauges required for quick installation and easy maintenance.

RXA-21


PERFORMANCE (60HZ)

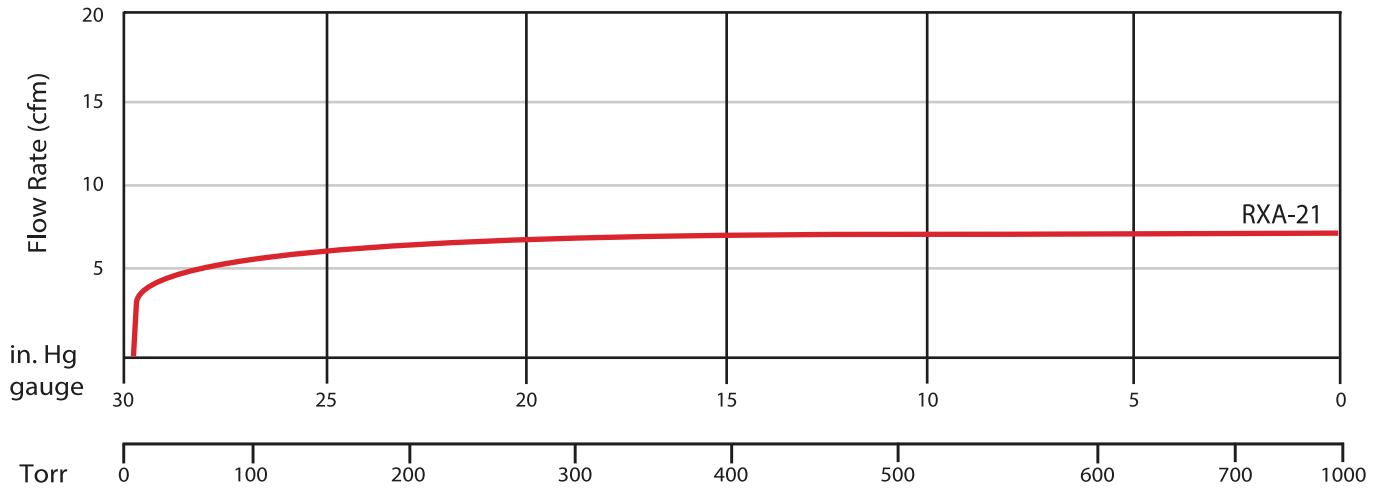

Model	Phase	Displacement (cfm)	Ultimate Continuous Vacuum (inHg/Torr)	Motor Output	Motor Speed (RPM)	Voltage (V)	FLA	Noise Level (dBA)	Approx. Weight (lb)	Oil Capacity (L)
RXA-21	3	11	29.33/15.0	0.5	1800	230/460	TBD	59	44	0.5

All measurements are ±10%. Standard motor is Class 1 Div 2.

APPROXIMATE DIMENSIONS

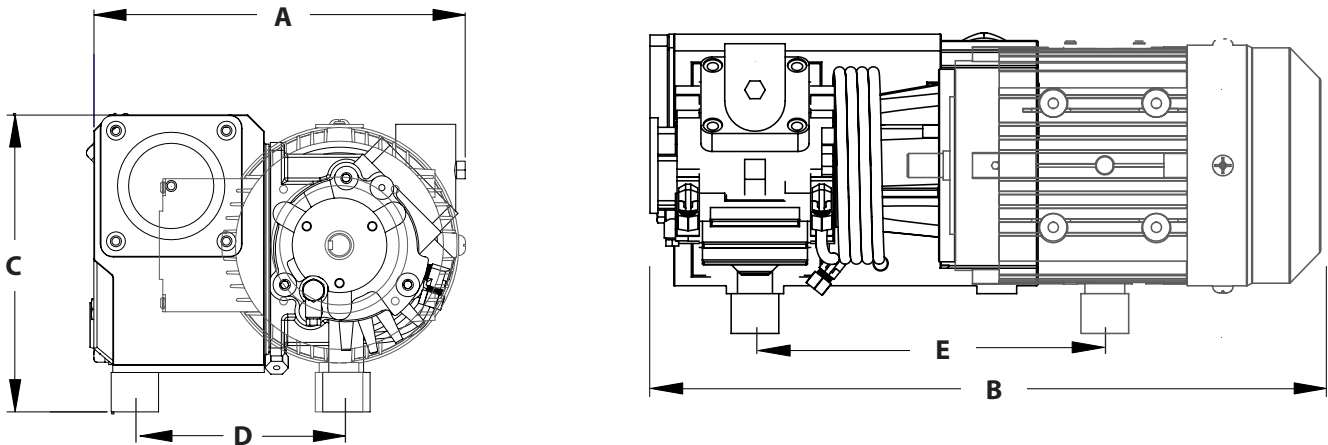

Model	A	B	C	D	E	Inlet/Outlet
RXA-21	10.2"	16.6"	7.4"	5.3	8.7	1.25" NPT

Please contact the factory for precise dimensions.

CONTACT

