



## FEATURES

- Single stage, direct-driven
- Air-cooled, no water required
- Simple installation
- Low noise levels
- Compact design
- Integral exhaust filter, oil free discharge air
- Includes pressure gauge and gas ballast


## APPLICATIONS

- Meat packaging
- Food processing
- Thermoforming
- Composites
- Medical
- Laboratory
- Vacuum cooling
- Robotics
- Degassing
- Autoclaves

## OPTIONAL ACCESSORIES

- Pre-Assembled Vacuum Kit Available (KVRXA-25 & KVRXA-40): Includes all plumbing, filtration, check-valves, regulating valves, and gauges required for quick installation and easy maintenance.



## PERFORMANCE (60HZ)

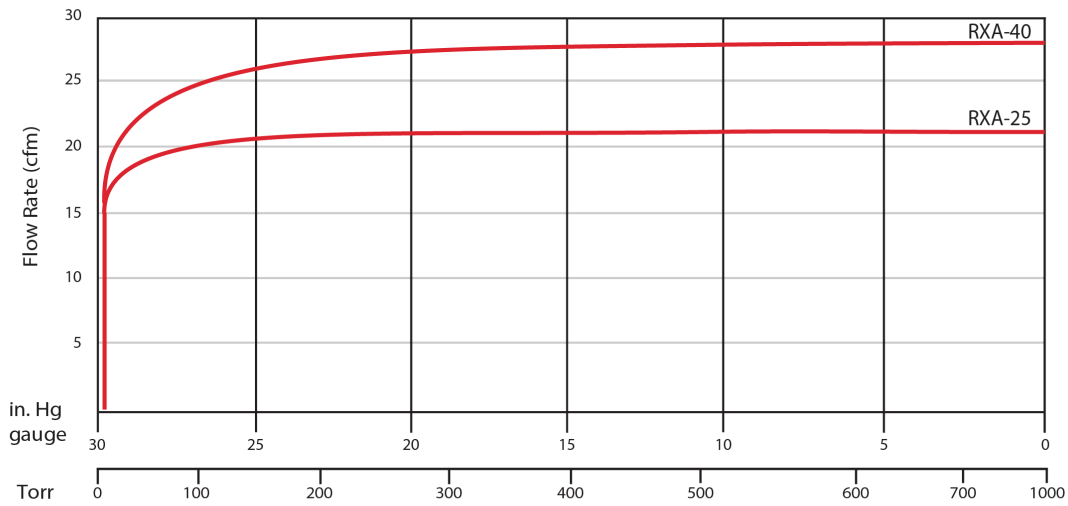

Model	Phase	Displacement (cfm)	Ultimate Continuous Vacuum (inHg/Torr)	Motor Output	Motor Speed (RPM)	Voltage (V)	FLA	Noise Level (dBA)	Approx. Weight (lb)	Oil Capacity (L)
RXA-25	3	21	29.91/0.075	1.5	1800	230/460	4.4/2.2	67	104	1.4
RXA-25-SP	1	21	29.91/0.075	1.5	1800	115/208-230	13.0/7.2-6.5	67	104	1.4
RXA-40	3	28	29.91/0.075	2.0	1800	230/460	5.8/2.9	67	117	1.4
RXA-40-SP	1	28	29.91/0.075	2.0	1800	115/208-230	17.6/9.7-8.8	67	117	1.4

All measurements are ±10%. Standard motor is Class 1 Div 2.

## APPROXIMATE DIMENSIONS

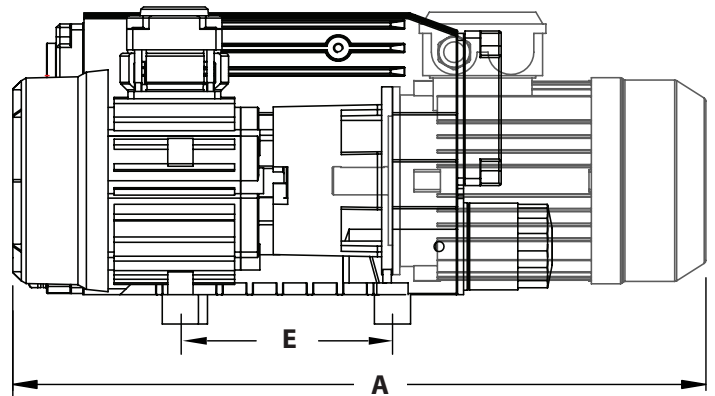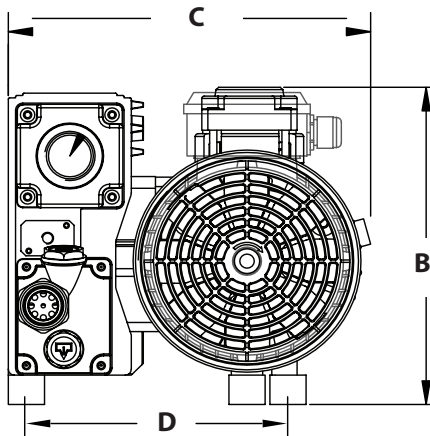

Model	A	B	C	D	E	Inlet/Outlet
RXA-25	22.6"	11.9"	10.6"	8.5"	6.9"	1.25" NPT
RXA-25-SP	24.8"	11.9"	10.6"	8.5"	6.9"	1.25" NPT
RXA-40	24.8"	11.9"	10.6"	8.5"	7.5"	1.25" NPT
RXA-40-SP	24.8"	11.9"	10.6"	8.5"	7.5"	1.25" NPT

Please contact the factory for precise dimensions.

