



Republic Positive Displacement Blower Stands are ideal for blower packages comprised of a blower, motor, belt guard, discharge silencer, and inlet silencer. For easy installation, the stand and discharge silencer are shipped pre-assembled. The belt guard is optional and sold separately.

STAND DESCRIPTION


- Heavy duty carbon steel construction with a high quality gray primer finish or optional painted finish for additional charge.
- Compact design.
- Mounting holes for blower are pre-punched for easy assembly.
- Pre-cut holes for various NEMA motor frames, URAI and RAM Howden Roots Positive Displacement (PD) Blower sizes and belt guards (sold separately).
- Center distance between blower and motor is pre-calculated for each stand and belt guard combination.
- Discharge silencer is integrated with base frame.
- Adjustable carbon steel belt guard with gray finish and option to private label with any logo (sold separately).

IMMEDIATE AVAILABILITY

- Standardized models designed specifically for quick delivery.

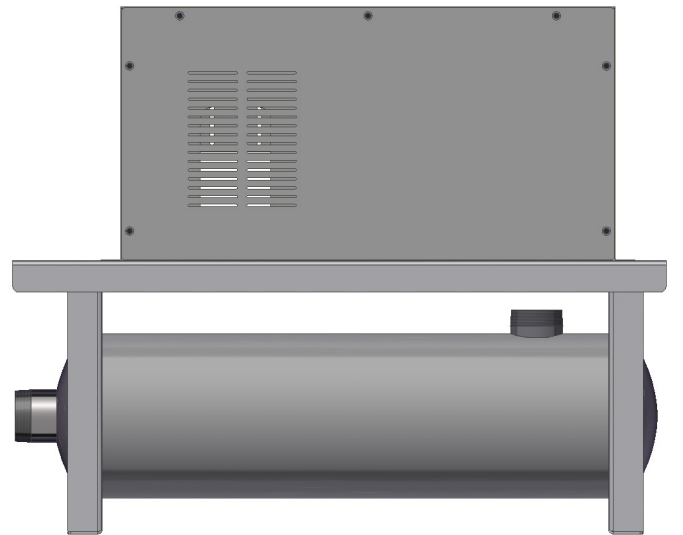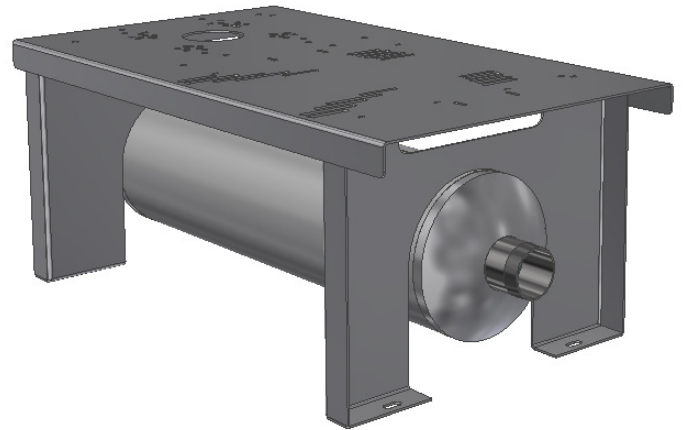


Optional belt guard shown

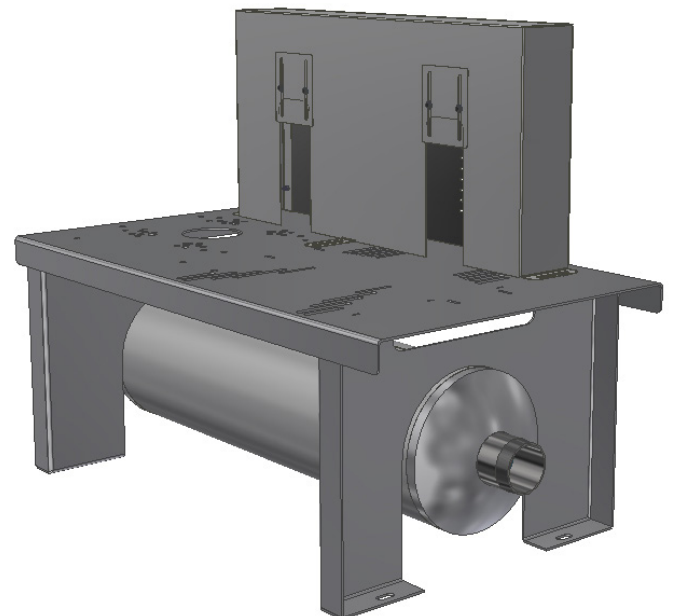

Optional belt guard shown

APPROXIMATE DIMENSIONS

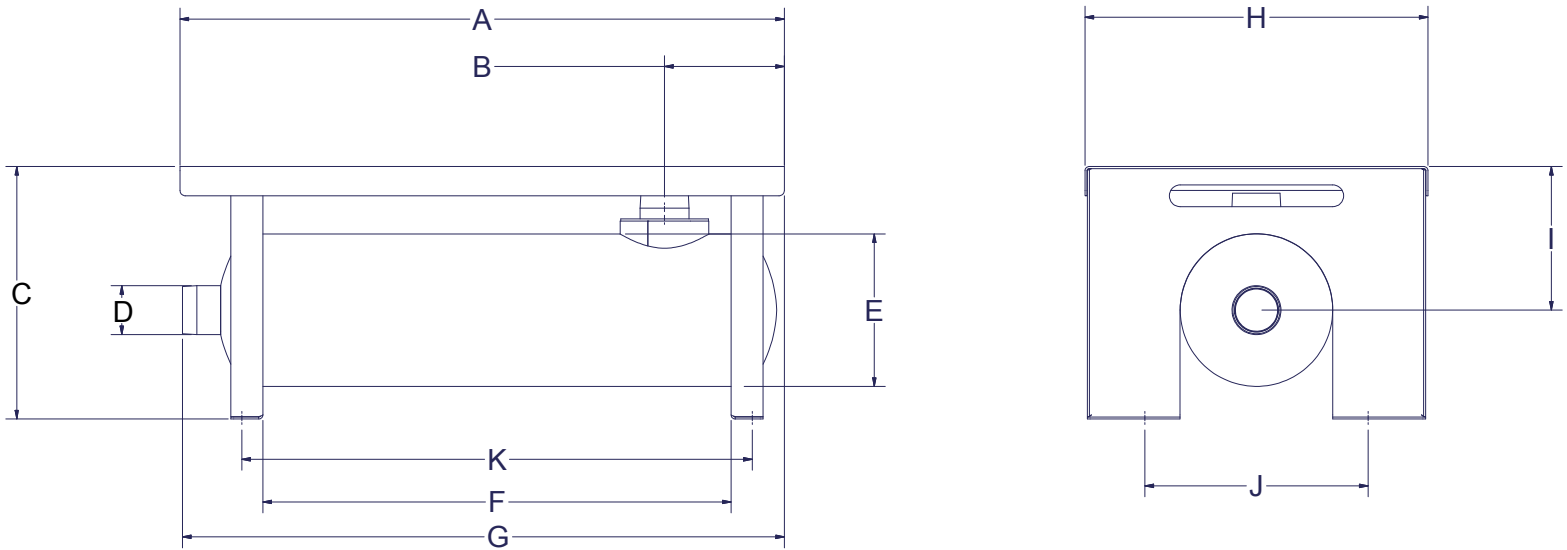

Dimensions - Stand Only														
Part Number	Table Size	Unit	A	B	C	D	E	F	G	H	I	J	K	Weight
900-1320	2"	in	34.50	8.44	15.19	2" NPT	8.00	30.05	35.63	19.06	8.69	12.00	28.05	115 lb
900-1325	2.5"	in	48.00	8.81	19.19	2.5" NPT	10.00	42.00	47.50	28.00	11.19	18.00	37.90	260 lb
900-1330	3"	in	48.00	8.81	19.19	3" NPT	10.00	42.00	47.50	28.00	11.19	18.00	37.90	260 lb
900-1340	4"	in	55.50	11.00	23.19	4" NPT	14.00	43.00	55.28	31.50	13.19	20.50	46.88	300 lb
900-1360	6"/8"	in	74.00	13.00	29.75	6"/8" Flange	18.00	57.50	70.18	41.00	17.75	30.00	61.50	550 lb
900-1310	10"	Contact Republic for Information												

Stand Part Number	Fits Blowers:						
	URAI	URAI-DSL	URAI-J	URAI-DSL-J	URAI-G	RAM	RAM-J
900-1320	22, 24, 32, 33, 42	22, 24, 32, 33, 42	22, 24, 32, 33, 42	22, 24, 32, 33, 42	22, 24, 32, 33, 42	N/A	
900-1325	36, 45, 53	36, 45, 53	36, 45, 53	36, 45, 53	36, 45, 53	N/A	
900-1330	47, 65	47, 65	47, 65	47, 65	47, 65	404	404
900-1340	56, 59, 68, 76	56, 59, 68, 76	56, 59, 68, 76	56, 59, 68, 76	56, 59, 68, 76	406, 409	409
900-1360	615, 711, 718	615, 711, 718	615, 711, 718	615, 711, 718	615, 711, 718	412, 616	412, 418
900-1310	N/A					624	624